HITACHI

# SERVICE MANUAL

TK | No. 2155E

# VT-44AY

2155 E

*Technical Data*

This service manual describes the VT-44AY. This model differs from VT-34A only in external coloring, and the circuit configuration is the same. Therefore, Only the parts list (all the items are described) is shown in this service manual. It is requested to use service manual No. 2089E for the VT-34A together with this service manual.

## TABLE OF CONTENTS


REPLACEMENT PARTS LIST

ELECTRICAL PARTS.....1 MECHANICAL PARTS.....4


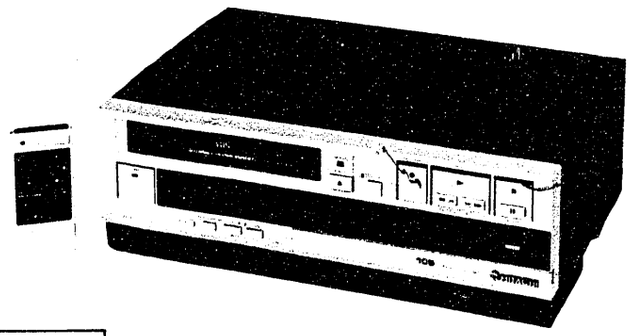

VHS

**THIS VIDEO DECK IS A VHS TYPE VIDEO RECORDER.**
**FOR PROPER OPERATION, ONLY THE VHS TYPE CASSETTE MUST BE USED.**

SPECIFICATIONS AND PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT

# VIDEO CASSETTE RECORDER

**June 1984** **TOKAI WORKS**

## RERLACEMENT PARTS LIST

### ELECTRICAL PARTS

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| | | CAPACITORS |
| C102-105 | 0209022 | CERAMIC DISC (RESISTOR SHAPE) 0.002 2MF+- |
| C106 | 0209026 | CERAMIC DISC (RESISTOR SHAPE) 0.01M F+-30 |
| C415 | 0209026 | CERAMIC DISC (RESISTOR SHAPE) 0.01M F+-30 |
| C418 | 0209010 | CERAMIC DISC (RESISTOR SHAPE) 1000P F+-10 |
| C437 | 0209008 | CERAMIC DISC (RESISTOR SHAPE) 680PF +-10% |
| C485 | 0256157 | ELECTROLYTIC 33UF 16V |
| C486 | 0256155 | ELECTROLYTIC 10UF 16V |
| C51 | 0209011 | CERAMIC DISC (RESISTOR SHAPE) 150PF +-10% |
| C52 | 0209005 | CERAMIC DISC (RESISTOR SHAPE) 390PF +-10% |
| C53 | 0209027 | CERAMIC (RESISTOR SHAPE) 0.01MF+-30 % |
| C6 | 0256405 | TANTALUM ELECTROLYTIC 10MF 16V |
| C609 | 0209010 | CERAMIC DISC (RESISTOR SHAPE) 1000P F+-10 |
| C610 | 0209026 | CERAMIC DISC (RESISTOR SHAPE) 0.01M F+-30 |
| C613 | 0209026 | CERAMIC DISC (RESISTOR SHAPE) 0.01M F+-30 |
| C616 | 0208141 | CERAMIC CAPACITOR 100PF+-5% |
| C624 | 0209026 | CERAMIC DISC (RESISTOR SHAPE) 0.01M F+-30 |
| C426 | 0256473 | TANTALUM 4.7 16V1 |
| C642 | 0256473 | TANTALUM 4.7 16V1 |
| C701 | 0209024 | CERAMIC DISC (RESISTOR SHAPE) 4700P F+-30 |
| C903 | 0209027 | CERAMIC (RESISTOR SHAPE) 0.01MF+-30 % |
| C906 | 0209027 | CERAMIC (RESISTOR SHAPE) 0.01MF+-30 % |
| C907-908 | 0209027 | CERAMIC (RESISTOR SHAPE) 0.01MF+-30 % |
| C909 | 0209027 | CERAMIC (RESISTOR SHAPE) 0.01MF+-30 % |
| C914-915 | 0209027 | CERAMIC (RESISTOR SHAPE) 0.01MF+-30 % |
| | | RESISTORS |
| RA601 | 5378952 | RESISTOR BLOCK |
| RA701 | 5378821 | RESISTOR BLOCK |
| RT101 | 5007432 | SEMI VARIABLE 1.0KOHM |
| RT201 | 5007433 | SEMI VARIABLE 2.2KOHM |
| RT202 | 5007434 | SEMI VARIABLE 4.7KOHM |
| RT401 | 5007437 | SEMI VARIABLE 47KOHM |
| RT404 | 5007438 | SEMI VARIABLE 100KOHM |
| RT601 | 5007719 | SEMI VARIABLE 220KOHM |
| RT603-604 | 5007437 | SEMI VARIABLE 47KOHM |
| RT607 | 5007445 | SEMI VARIABLE 2.2KOHM |
| RT608 | 5007446 | SEMI VARIABLE RESISTOR 4.7KOHM |
| RV601 | 5005316 | RESISTOR RLOCK |
| R101 | 0134706 | COMPOSITION 3.3MOHM1/2W |
| R423 | 0170481 | FUSE RESISTOR 220HM+-5% 1/4W |
| R450 | 0170472 | FUSE RESISTOR 3.3OHM+-5% 1/4W |
| R488 | 0149705 | METAL FILM RESISTOR 470 OHM |

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| | | SEMI-CONDUCTORS |
| D002 | 5331592 | DIODE 1SS133 |
| D101 | 5331521 | DIODE S4VB10 |
| D102-103 | 5331671 | DIODE DS1350-FA3 |
| D104 | 5330131 | DIODE 1S2076 |
| D122-123 | 5331671 | DIODE DS1350-FA3 |
| D201 | 5331592 | DIODE 1SS133 |
| D203 | 5331592 | DIODE 1SS133 |
| D204-206 | 0575005 | DIODE 1N60 |
| D207-208 | 5331592 | DIODE 1SS133 |
| D211 | 5330131 | DIODE 1S2076 |
| D402-403 | 5331592 | DIODE 1SS133 |
| D481 | 5340205 | VARISTOR VD1221 |
| D482 | 5331592 | DIODE 1SS133 |
| D601-603 | 5331592 | DIODE 1SS133 |
| D604-605 | 5330131 | DIODE 1S2076 |
| D606 | 5331592 | DIODE 1SS133 |
| D607 | 5340021 | VARISTOR SILICON HV-46 10K |
| D608-614 | 5331592 | DIODE 1SS133 |
| D615 | 5331592 | DIODE 1SS133 |
| D617-625 | 5331592 | DIODE 1SS133 |
| D626 | 5331511 | DIODE DAN201 |
| D628 | 5331511 | DIODE DAN201 |
| D630 | 5331592 | DIODE 1SS133 |
| D631 | 5331592 | DIODE 1SS133 |
| D632-633 | 5331592 | DIODE 1SS133 |
| D701-730 | 5330132 | DIODE 1S2076A |
| D731 | 5330132 | DIODE 1S2076A |
| D732-739 | 5330132 | DIODE 1S2076A |
| D740 | 5331592 | DIODE 1SS133 |
| D741-743 | 5330132 | DIODE 1S2076A |
| D744 | 5330132 | DIODE 1S2076A |
| D745 | 5331592 | DIODE 1SS133 |
| D746-751 | 5330132 | DIODE 1S2076A |
| D752 | 5331592 | DIODE 1SS133 |
| D753 | 5330132 | DIODE 1S2076A |
| D754-755 | 5330132 | DIODE 1S2076A |
| D901-909 | 5331592 | DIODE 1SS133 |
| D913 | 5331511 | DIODE DAN201 |
| D915 | 5331511 | DIODE DAN201 |
| D921-922 | 5331671 | DIODE DS1350-FA3 |
| D923 | 5331592 | DIODE 1SS133 |
| D926 | 5331592 | DIODE 1SS133 |
| D931-932 | 5331592 | DIODE 1SS133 |
| IC1 | 5355261 | IC MPC1373H |
| IC101 | 5369911 | IC M54548L |
| IC141 | 5391032 | HOLEIC DN6838A |
| IC201 | 5375961 | IC HT4234 |
| IC202 | 5375973 | IC HT4235B |
| IC203 | 5374041 | IC HT-4233 |
| IC204 | 5369391 | IC MSL9378RS |

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| | | SEMI-CONDUCTORS |
| IC401 | 5352631 | IC BA5102 |
| IC402 | 5377231 | IC HT4401 |
| IC481 | 5355451 | IC HA13402 |
| IC51 | 5369512 | IC MPD554C-118 |
| IC52 | 5376231 | IC TA4373 |
| IC601 | 5350271 | IC BA301B |
| IC602 | 5355492 | IC HA11747A |
| IC603-604 | 5355501 | IC HA11749 |
| IC701 | 5351723 | IC MPC1363C |
| IC702 | 5261001 | DC-DC CONVERTOR |
| IC703 | 5361114 | IC M58839-660P |
| IC704 | 5377331 | IC HT4404 |
| IC901 | 5361133 | IC MD38825LU6 |
| IC902-903 | 5369171 | IC M54543L |
| IC904 | 5377131 | IC TA4398 |
| LED701-702 | 5381251 | LED SLH-54MT4 |
| LED703-707 | 5380721 | LED SLR-54UR4 |
| LED708-709 | 5380721 | LED SLR-54UR4 |
| LED711-722 | 5380721 | LED SLR-54UR4 |
| Q101-104 | 5323671 | TRANSISTOR 2SD1510-QP |
| Q105 | 5322733 | TRANSISTOR 2SA952ML |
| Q106 | 5321662 | TRANSISTOR 2SC2021S |
| Q107 | 5320064 | TRANSISTOR 2SC458D |
| Q108 | 5321662 | TRANSISTOR 2SC2021S |
| Q109 | 5323331 | TRANSISTOR 2SB772-Q |
| Q110 | 5321662 | TRANSISTOR 2SC2021S |
| Q141-142 | 5380132 | PHOTO TRANSISTOR PH101 |
| Q201-208 | 5321663 | TRANSISTOR 2SC2021RS |
| Q209 | 5320619 | TRANSISTOR 2SC1213CD |
| Q211 | 5321663 | TRANSISTOR 2SC2021RS |
| Q212-213 | 5321255 | TRANSISTOR 2SA844CD |
| Q214 | 5321663 | TRANSISTOR 2SC2021RS |
| Q215 | 5321255 | TRANSISTOR 2SA844CD |
| Q216 | 5321663 | TRANSISTOR 2SC2021RS |
| Q218-219 | 5321663 | TRANSISTOR 2SC2021RS |
| Q221-222 | 5321663 | TRANSISTOR 2SC2021RS |
| Q223 | 5320619 | TRANSISTOR 2SC1213CD |
| Q225 | 5322732 | TRANSISTOR 2SA952ML2 |
| Q226-227 | 5321663 | TRANSISTOR 2SC2021RS |
| Q228 | 5321255 | TRANSISTOR 2SA844CD |
| Q401-405 | 5323561 | TRANSISTOR DTC124F |
| Q406-407 | 5323032 | TRANSISTOR 2SC1841EF |
| Q408 | 5323041 | TRANSISTOR 2SA992FE |
| Q409 | 5323561 | TRANSISTOR DTC124F |
| Q410 | 5321213 | TRANSISTOR 2SD468C 190MHZ 0.9W |
| Q481-482 | 5321662 | TRANSISTOR 2SC2021S |
| Q51 | 5321663 | TRANSISTOR 2SC2021RS |
| Q602 | 5321663 | TRANSISTOR 2SC2021RS |
| Q603 | 5322892 | TRANSISTOR 2SA1198RS |
| Q604 | 5323561 | TRANSISTOR DTC124F |

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| Q605 | 5323562 | TRANSISTOR DTA124F |
| Q606 | 5323561 | TRANSISTOR DTC124F |
| Q608 | 5321298 | TRANSISTOR 2SC1740LN-SE |
| Q704-705 | 5321664 | TRANSISTOR 2SC2021Q |
| Q706-708 | 5323561 | TRANSISTOR DTC124F |
| Q710-711 | 5323561 | TRANSISTOR DTC124F |
| Q901-902 | 5322732 | TRANSISTOR 2SA952ML2 |
| Q904 | 5321666 | TRANSISTOR 2SC2021-SE |
| Q911-913 | 5323561 | TRANSISTOR DTC124F |
| ZD101 | 5331272 | ZENER DIODE HZ18-1 |
| ZD102 | 5330535 | DIODE HZ-9A2 |
| ZD103 | 5330393 | ZENER DIODE SILICON HZ6C 1MHZ |
| ZD104 | 5330534 | ZENER DIODE HZ12A3 |
| ZD105 | 5330313 | ZENNER DIODE HZ-7C |
| ZD106 | 5330325 | DIODE HZ9A2 |
| ZD201 | 5330319 | ZENER DIODE ZD701 |
| ZD481 | 5330713 | DIODE HZ-3B |
| ZD601 | 5330396 | ZENNER DIODE HZ-6A1 |
| ZD701 | 5332201 | ZENNER DIODE HZT33-02 |
| ZD702 | 5330392 | ZENER DIODE SILICON HZ6D 1MHZ 400MW |
| | | TRANSFORMERS |
| T401 | 5260366 | BIAS COIL |
| | | COILS |
| L1 | 5120964 | TRAP COIL 38KHZ |
| L101 | 5270241 | LINE FILTER |
| L103 | 5152337 | CHOKE COIL 100UH+-10% |
| L201 | 5152337 | CHOKE COIL 100UH+-10% |
| L203 | 5152342 | CHOKE COIL 220UH+-10% |
| L204 | 5152349 | CHOKE COIL 820MH |
| L205 | 5152331 | CHOKE COIL 33UH+-10% |
| L206-207 | 5152337 | CHOKE COIL 100UH+-10% |
| L208 | 5152331 | CHOKE COIL 33UH+-10% |
| L209 | 5152336 | CHOKE COIL 82UH+-10% |
| L210 | 5152337 | CHOKE COIL 100UH+-10% |
| L211 | 5152333 | CHOKE COIL 47UH+-10% |
| L212-214 | 5152337 | CHOKE COIL 100UH+-10% |
| L215-216 | 5152333 | CHOKE COIL 47UH+-10% |
| L217 | 5152328 | CHOKE COIL 22UH+-10% |
| L220-221 | 5152479 | CHOKE COIL 0.47MICROH |
| L401 | 5150366 | HOKE COIL 15MH |
| L402 | 5150362 | CHOKE COIL |
| L403 | 5152099 | CHOKE COIL |
| L405 | 5120563 | TRAP COIL 70KHZ |
| L51 | 5159027 | CHOCKE COIL 100MH |
| L701 | 5152607 | CHOKE COIL 100MICRO H |
| | | CRYSTALS |
| CE51 | 5780631 | CERAMIC OSCILLATOR 400KHZ |
| CE701 | 5780504 | XTAL |
| CE901 | 5780631 | CERAMIC OSCILLATOR 400KHZ |

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| | | MISCELLANEOUS |
| | 6871351 | HOLDER(HOLE IC) |
| | 7685261 | SHEET |
| CP201 | 5123637 | TRAP COIL |
| CP202 | 5162331 | LOW PASS FILTER |
| CP203 | 5162333 | HIGH PASS FILTER |
| CP204 | 5162322 | DELAYLINE |
| CP205 | 5162341 | LOW PASS FILTER |
| CP206 | 5123831 | TRAP FILTER |
| CP207 | 5162383 | BAND PASS FILTER |
| CP208 | 5162211 | LOW PASS FILTER |
| CP209 | 5162042 | BAND PASS FILTER |
| DL201 | 5785213 | DELAY LINE |
| DL202 | 5785054 | DELAY LINE |
| FU101 | 5721406 | FUSE 125V 2A |
| FU102 | 5721409 | FUSE 125V 4A |
| PD1 | 5380892 | PHOT. DIODE PH302 |
| PH101 | 0249795 | POTHISTOR |
| PH901 | 0249691 | POTHISTOR |
| PV701 | 5009082 | CHANNEL PRESET RESISTOR |
| S143-144 | 5633362 | PUSH SWITCH |
| S601 | 5624441 | SLIDE SWITCH |
| S701-715 | 5633911 | SWITCH |
| S717-718 | 5633911 | SWITCH |
| S719-720 | 5633911 | SWITCH |
| S721 | 5633694 | SWITCH (AFS) |



## MECHANICAL PARTS

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| | | FOR FINAL ASSEMBLY |
| 101 | 6049178 | TOP COVER |
| 102 | 6049033 | BOTOM COVER |
| 103 | 7741444 | FELT (LEG) |
| 104 | 6236304 | JACK PANEL ASSEMBLY |
| 105 | 6188093 | JACK DOOR |
| 106 | 6236482 | FRONT PANEL ASSEMBLY |
| 107 | 6065881 | BUTTON (COUNTER/RESET) |
| 108 | 6066831 | BUTTON (IRT) |
| 109 | 6069242 | FUNCTION BUTTON ASSEMBLY |
| 110 | 6875331 | GUIDE (CH-LED) |
| 111 | 5875238 | CHANNEL CARD |
| 112 | 6108242 | PRESET DOOR ASSEMBLY |
| 113 | 6075091 | KNOB (TRAKING) |
| 114 | 6868882 | CAP (V.R) |
| 115 | 6065992 | CAP |
| 116 | 7683073 | COVER |
| 117 | 6644692 | CASSETTE DOOR |
| 118 | 5676425 | JACK PLATE(FRONT) |
| 119 | 5676432 | JACK PLATE (REAR) |
| 121 | 5587061 | RF CONVERTER |
| 122 | 6875441 | HOLDER (LED) PT |
| 123 | 5311061 | TIMER DISPLAY |
| 124 | 6875322 | HOLDER (TIMER) |
| 125 | 6875241 | HOLDER (CH LED) |
| 126 | 6875451 | LED HOLDER |
| 127 | 6875252 | COVER (AC CORD) |
| 128 | 6794091 | BUSHING |
| 129 | 5746492 | POWER CORD |
| 130 | 5213672 | POWER TRANSFORMER |
| 132 | 5722211 | FUSE HOLDER |
| 133 | 5586016 | VTR FRONT END |
| 134 | 6875261 | RF HOLDER |
| 140 | 7741791 | FELT (LEG) |
| 141 | 7741781 | FELT (LEG) |
| 142 | 7692793 | CHANNEL SHEET |
| 146 | 6875401 | PRESET DRIVER |
| 147 | 6872034 | CAP(I.R) |
| 148 | 6877432 | COVER |
| 149 | 7681951 | INSULATION SHEAT |
| 202 | 6414654 | SUPPLY REEL ASSEMBLY |
| 203 | 6414674 | TAKE-UP REEL ASSEMBLY |
| 205 | 6873291 | COLOR |
| 206 | 7787412 | WASHER |
| 207 | 7778859 | POLYSLIDER WASHER |
| 208 | 6865662 | BRAKE ARM |
| 209 | 7382651 | TENSION ARM |
| 210 | 6865804 | BRAKE L |
| 211 | 6865811 | BRAKE R |
| 212 | 6302471 | SPRING |
| 213 | 6543862 | SPRING (T.ARM) |
| 214 | 7376271 | TENSION BAND |
| 215 | 6873272 | SPRING HOLDER (BACK TENSION) |
| 216 | 7382673 | ARM BRAKET ASSEMBLY |
| 217 | 6875372 | FR ARM ASSEMBLY |
| 218 | 7376303 | LOADING LINK R ASSEMBLY |
| 219 | 7376313 | LOADING LINK L ASSEMBLY |
| 220 | 6978301 | GUIDE ROLLER BASE (I) |
| 221 | 6978291 | GUIDE ROLLER BASE (O) |
| 224 | 6869481 | GUIDE ROLLER |
| 225 | 6868061 | GUIDE ROLLER ASSEMBLY (OUT) |
| 226 | 7376176 | GUIDE BASE HOLDER |
| 227 | 6977561 | CATCHER (SUPPLY) |
| 228 | 6977571 | CATCHER (TAKE-UP) |
| 229 | 7570671 | TAPE GUIDE (I) |
| 230 | 6304903 | SPRING |
| 231 | 6873332 | IMPEDANCE ARM ASSEMBLY |
| 232 | 5448792 | FULL ERASE HEAD |
| 233 | 6302391 | SPRING |
| 234 | 5447391 | AUDIO CONTROL HEAD |
| 235 | 6304906 | SPRING |
| 236 | 7786245 | WASHER |
| 237 | 6878931 | S SUB BRAKE |
| 238 | 6300084 | SPRING |
| 239 | 5577903 | CAPSTAN MOTOR |
| 240 | 6865675 | RECORDING PREVENTION ARM |
| 241 | 5633971 | SWITCH (S141) |
| 242 | 7788143 | POLYSLIDER WASHER |
| 243 | 6977811 | PRESSURE ROLLER ARM ASSEMBLY |
| 246 | 6547811 | SPRING |
| 247 | 7549271 | X-ADJUST SCREW |
| 248 | 5625091 | SLIDE SWITCH |
| 251 | 7571871 | TAPE GUIDE (O) |
| 252 | 6873721 | CAP |
| 253 | 7382521 | HOLDER |
| 254 | 7380942 | HOLDER (HEATER) |
| 255 | 6977521 | COLLAR |
| 301 | 7395302 | CLATCH PLATE ASSEMBLY |
| 302 | 6355561 | BELT |
| 303 | 7379666 | BLAKE SLIDER |
| 304 | 6865733 | MODE SLIDER |
| 305 | 6547821 | SPRING |
| 306 | 6866297 | LORDING GEAR ASSEMBLY |
| 307 | 6865791 | TENTION ARM |
| 311 | 7376353 | LOADING MOTOR ASSEMBLY |
| 312 | 6355601 | BELT |
| 313 | 6355591 | BELT |
| 314 | 6977431 | FLYWHEEL |
| 315 | 7788142 | POLYSLIDER WASHER (THRUST) |
| 316 | 7788861 | WASHER |
| 317 | 6357531 | BELT |
| 318 | 6355581 | BELT |

| SYMBOL-NO | P-NO | DESCRIPTION |
|---|---|---|
| | | FOR FINAL ASSEMBLY |
| 319 | 7376323 | FLYWHEEL HOLDER |
| 320 | 6869291 | PULLEY |
| 321 | 7778859 | POLYSLIDER WASHER |
| 322 | 6355561 | BELT |
| 323 | 0249797 | HEATER |
| 401 | 7395283 | FRONT LORDING MECHA. ASSEMBLY |
| 404 | 7382474 | CASSETTE HOLDER |
| 405 | 7362444 | LORDING MOTOR ASSEMBLY |
| 406 | 5997932 | FL MOTOR ASSEMBLY |
| 407 | 7382562 | LORDING ARM (L) |
| 408 | 7362552 | LORDING ARM (R) |
| 409 | 7382571 | LOCK ARM |
| 410 | 6549142 | SPRING (LOCK ARM) |
| 412 | 6873213 | DOOR ARM |
| 413 | 6300722 | SPRING (DOOR ARM) |
| 414 | 6873101 | HOLDER |
| 415 | 7557891 | HOLDER LINK ASSEMBLY |
| 416 | 6873192 | GEAR (L) |
| 417 | 6873182 | LOADING GEAR (R) |
| 418 | 6877761 | LOADING GEAR (L) |
| 419 | 6873141 | LORDING GEAR (R) |
| 420 | 6543883 | SPRING |
| 421 | 6543884 | SPRING |
| 422 | 6873161 | RECORDING PREVENTION ARM |
| 423 | 6549152 | SPRING |
| 424 | 7382491 | CHASSIS HOLDER |
| 501 | 5458991 | UPPER CYLINDER ASSEMBLY |
| 502 | 5458422 | LOWER CYLINDER ASSEMBLY |
| 503 | 5792131 | BRUSH |
| 504 | 5792091 | STATOR |
| 505 | 5772601 | ROTOR ASSEMBLY |
| 506 | 5792121 | WIRE HOLDER |
| 507 | 5994731 | CYL.FG PC BOARD |
| 901 | 7781131 | B TIGHTING SCREW-3MMDX12MM |
| 902 | 8699412 | BIND TAPPING SCREW-3MMDX12MM(BLACK) |
| 903 | 8699408 | BT BIND HEAD SCREW-3MMDX8MM (BLACK) |
| 904 | 8671406 | DT SCREW-3MMDX6MM |
| 905 | 8699412 | BIND TAPPING SCREW-3MMDX12MM(BLACK) |
| 906 | 8691412 | BT BIND SCREW-3MMDX12MM |
| 907 | 8671406 | DT SCREW-3MMDX6MM |
| 908 | 8741408 | SCREW (B3X8) |
| 909 | 8671408 | DT BIND SCREW-3MMDX8MM |
| 910 | 8691608 | SCREW 4X8BT |
| 911 | 8815116 | LOCK WASHER |
| 950 | 7541395 | SPECIAL SCREW |
| 951 | 8691408 | BIND TAPPING SCREW-3MMDX8MM (BLACK) |
| 952 | 8741408 | SCREW (B3X8) |
| 954 | 7781133 | BT SCREW-3MMD |
| 955 | 8691408 | BIND TAPPING SCREW-3MMDX8MM (BLACK) |
| 956 | 8691408 | BIND TAPPING SCREW-3MMDX8MM (BLACK) |
| 959 | 7773083 | SCREW |
| 960 | 8741408 | SCREW (B3X8) |
| 961 | 7782761 | SCREW(B3X8 WITH S.WASHER) |
| 962 | 8650412 | SCREW 3X12 WITH SPRING WASHER |
| 963 | 8821114 | 3D NUT |
| 964 | 8741103 | SCREW(2X3B) |
| 965 | 7781872 | SCREW-3MMDX8MM |
| 966 | 7773086 | SCREW |
| 967 | 7782781 | SCREW 3X8BT |
| 967 | 8741414 | BINDING SCREW - 3MMD X 14MM |
| 968 | 8821114 | 3D NUT |
| 969 | 8741408 | SCREW (B3X8) |
| 970 | 8691408 | BIND TAPPING SCREW-3MMDX8MM (BLACK) |
| 971 | 36914U8 | BIND TAPPING SCREW-3MMDX8MM (BLACK) |
| 972 | 8691312 | BT BIND SCREW-2.6MMDX12MM |
| 974 | 7541392 | SCREW |
| 975 | 7781131 | B TIGHTING SCREW-3MMDX12MM |
| 978 | 8652412 | SCREW 3X12 WITH SPRING WASHER |
| 981 | 8678405 | DT SCREW-3MMDX5MM (BLACK) |
| 982 | 8811116 | 4D WASHER |
| 983 | 7230902 | E RING |
| 983 | 7230902 | E RING |
| 988 | 8691410 | BT BIND SCREW-3MMDX10MM |
| 989 | 8691408 | BIND TAPPING SCREW-3MMDX8MM (BLACK) |
| 990 | 8741408 | SCREW (B3X8) |
| 991 | 8741406 | BIND SCREW - 3MMD X 6MM |
| 996 | 8741408 | SCREW (B3X8) |
| | | FOR ACCESSARIES |
| | 563R033 | WIRELESS REMOTE CONTROL BOX |
| | 5679542 | CONNECTOR |
| | 5687572 | MATCHING BOX |
| | 5761052 | BATTERY |
| | 5893172 | FEEDER CABLE |
| | 5896764 | CABLE |





HITACHI

**HITACHI SALES CORPORATION OF AMERICA**
Eastern Regional Office
1290 Wall Street West, Lyndhurst, New Jersey 07071, U.S.A.
Tel. 201-935-8980

**Mid-Western Regional Office**
1400 Morse Ave., Elk Grove Village, Ill. 60007, U.S.A.
Tel. 312-593-1550

**Southern Regional Office**
510 Plaza Drive, College Park, Georgia 30349, U.S.A.
Tel. 404-763-0360

**Western Regional Office**
401 West Artesia Boulevard, Compton, California 90220 U.S.A.
Tel. 213-537-8383

**HITACHI SALES CORPORATION OF HAWAII. INC.**
3219 Koapaka Street. Honolulu, Hawaii 96819, U.S.A.
Tel. 808-836-3621

**HITACHI (HSC) CANADA INC.**
3300 Trans-Canada Highway, Pointe Claire, Quebec,
H9R 1B1, Canada
Tel. 514-697-9150

**Hitachi Sales Centroamericana, S.A.**
San Rafael de Escazu, (Apartado 10272), San José,
Costa Rica
Tel. 28-2011, 28-0037

**Hitachi Sales Corporation de Panama, S.A.**
Nuevo Reparto el Carmen, Calle Ramon Arias y Calle B
Edificio Brasil 100, (Apartado 7657) Panama 5
Panama City, Rep. of Panama
Tel. 61-3100, 61-4305

**Hitachi Sales de Chile Cia., Ltda.**
Av. Mexico, 0183, Casilla 9793, Correo Central
Santiago, Chile
Tel. 774165

**HITACHI Ltd. TOKYO JAPAN**
Head Office: THE HITACHI ATAGO BLDG.
No. 15-12, 2-Chome Nishi-Shinbashi
Minato-Ku, Tokyo 105, Japan
Tel. Tokyo (03) 502-2111

VT-44AY

**VT-44AY TK No. 2155E TOKAI**

Printed in Japan (H.E.C1)